

IPVA High-pressure internal gear pumps for constant speed drives


Product data sheet



Advantages

- + Very high overall efficiency
- + Very good pulsation behavior
- + Low noise emission
- + Multiple flow capable

Function

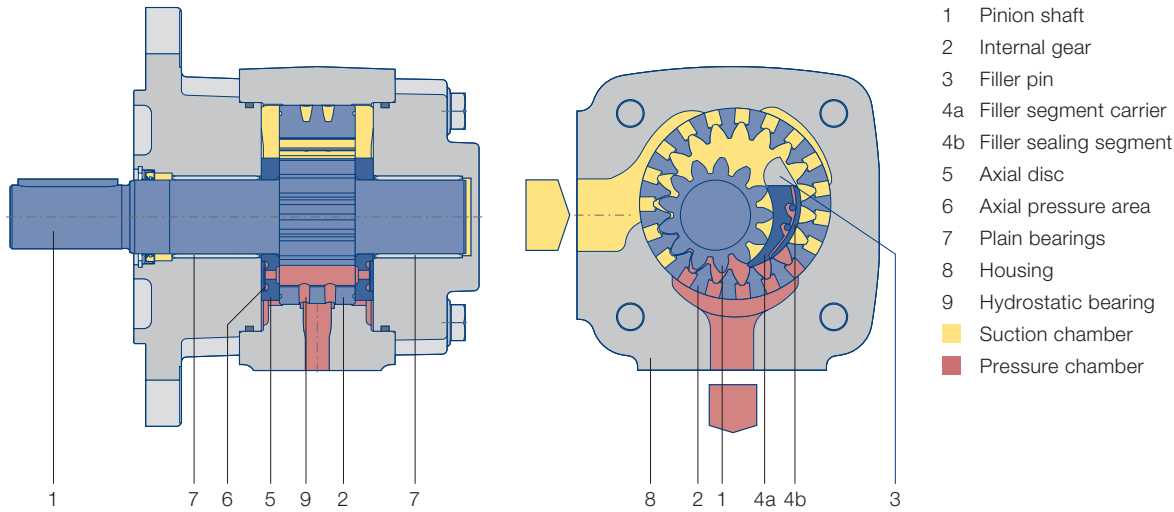

By rotation of the gears inside the pump, the pressure fluid (usually hydraulic oil) is drawn into the cavity between the pinion and internal gear. Optimized cross-sectional areas on suction side as well as on pressure side allow operation over a wide range of speed.

In the radial direction, the gear chambers are closed by gear meshing and the filler piece. In the axial direction, the axial plates seal the pressure chamber with the minimal possible gap. This design minimizes volume losses and increases efficiency.

Calculations

Pump flow $Q = V_{gth} \cdot n \cdot \eta_v \cdot 10^{-3} \text{ [l/min]}$

Power $P = \frac{Q \cdot \Delta p}{600 \cdot \eta_g} \text{ [kW]}$

V_{gth}	pump volume per revolution [cm ³]
n	Speed [rpm]
η_v	Volumetric efficiency
η_g	Overall efficiency
Δp	Differential pressure [bar]

Technical data

Design	Internal gear pump with radial and axial sealing gap compensation
Type	IPVA
Mounting types	SAE hole flange; ISO 3019/1
Line mounting	SAE suction and pressure flange J 518 C Code 61
Sense of rotation	Right hand rotation
Mounting position	any
Shaft load	For details of radial and axial drive shaft loads please contact J.M. Voith SE & Co. KG
Input pressure	0.8 ... 3 bar absolute pressure (at start up for short time 0.6 bar)
Pressure fluid	HLP mineral oils DIN 51524, part 2 or 3
Viscosity range of the pressure fluid	10 ... 300 mm ² s ⁻¹ (cSt)
Permissible start viscosity	max. 2000 mm ² s ⁻¹ (cSt)
Permissible temperature of the pressure fluid	-10 ... +80 °C
Required purity of the pressure fluid	Class 19/17/14 (ISO 4406), Class 8 (NAS 1638)
Filtration	Filtration quotient min. $\beta_{20} \geq 75$, recommended $\beta_{10} \geq 100$ (longer life time)
Permissible ambient temperature	-10 ... +60 °C

Characteristics

Type, Size – delivery	Displacement per revolution [cm ³]	Speed min. [rpm]	Speed max. [rpm]	Delivery at 1500 rpm [l/min]	Continuous pressure [bar]	Peak pressure at 1 500 rpm [bar]	Moment of inertia [kg cm ²]
IPVA 3 – 3.5	3.6	400	3 600	5.4	300	320	0.34
IPVA 3 – 5	5.2	400	3 600	7.8	300	320	0.42
IPVA 3 – 6.3	6.4	400	3 600	9.6	300	320	0.49
IPVA 3 – 8	8.2	400	3 600	12.3	300	320	0.58
IPVA 3 – 10	10.2	400	3 600	15.3	300	320	0.70
IPVA 4 – 13	13.3	400	3 600	19.9	300	320	2.25
IPVA 4 – 16	15.8	400	3 400	23.7	300	320	2.64
IPVA 4 – 20	20.7	400	3 200	31.0	300	320	3.29
IPVA 4 – 25	25.4	400	3 000	38.1	300	320	3.70
IPVA 4 – 32	32.6	400	2 800	48.9	250	280	4.44
IPVA 5 – 32	33.1	400	3 000	49.6	300	320	8.62
IPVA 5 – 40	41.0	400	2 800	61.5	300	320	10.20
IPVA 5 – 50	50.3	400	2 500	75.4	280	315	11.60
IPVA 5 – 64	64.9	400	2 200	97.3	230	250	14.40
IPVA 6 – 64	64.1	400	2 600	96.1	300	320	25.73
IPVA 6 – 80	80.7	400	2 400	121.0	280	315	30.90
IPVA 6 – 100	101.3	400	2 100	151.9	250	300	36.10
IPVA 6 – 125	126.2	400	1 800	189.3	210	250	43.70


The values given apply for

- Pumping of mineral oils with a viscosity of 20...40 mm²s⁻¹ (cSt)
- An input pressure of 0.8 ... 3.0 bar absolute


Notes

- Peak pressures apply for 15 % of operating time with a maximum cycle time of 1 minute.
- Please inquire about peak pressures at non-standard speeds.
- Due to production tolerances, the pump volume may be reduced by up to 1.5 %.


IPVA 3, rotation and dimensions

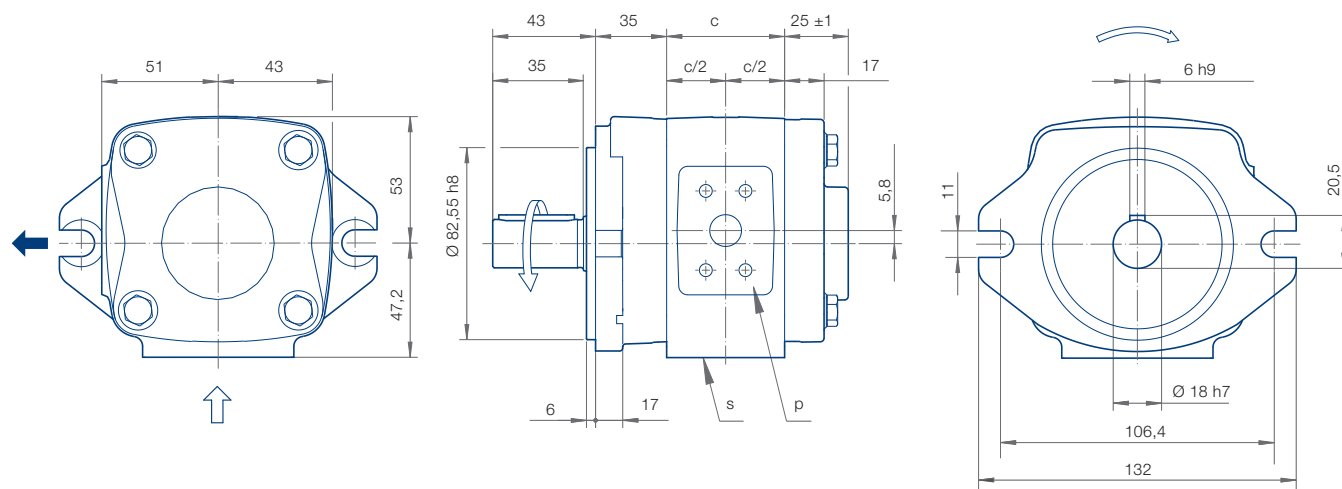

Pressure port (P)



Suction port (S)



Type/ Delivery	c [mm]	g [mm]	h [mm]	i [mm]	k [mm]	l Thread	r [mm]	v [mm]	w Thread	Weight [kg]	SAE Flange No.	
IPVA 3 – 3.5	35	9	14	38.1	17.5	M8x13	38.1	17.5	M8x13	3.4	10	10
IPVA 3 – 5	39	11	14	38.1	17.5	M8x13	38.1	17.5	M8x13	3.6	10	10
IPVA 3 – 6.3	42	11	19	47.6	22.3	M10x15	38.1	17.5	M8x13	3.8	10	11
IPVA 3 – 8	46.5	13	19	47.6	22.3	M10x15	38.1	17.5	M8x13	4.0	10	11
IPVA 3 – 10	51.5	13	21	52.4	26.2	M10x15	38.1	17.5	M8x13	4.2	10	12

IPVA 3, design

Rotation

Mounting flange



Shaft end

Standard

Rotation clockwise




SAE 2-hole
flange




0

Parallel shaft
with keyway
connection




1


IPVA 4, rotation and dimensions

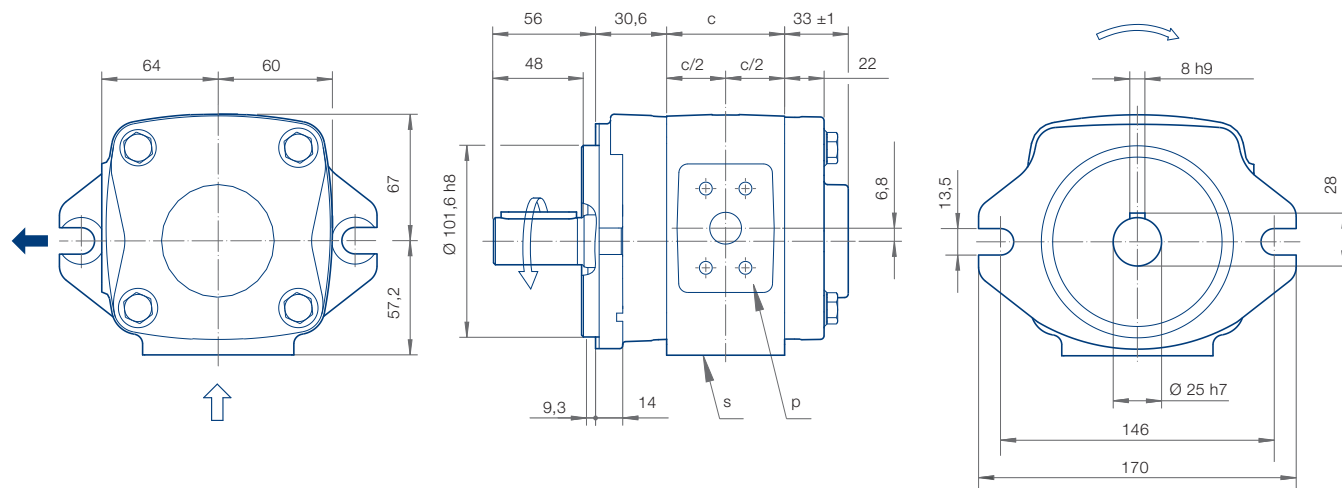

Pressure port (P)



Suction port (S)



Type/ Delivery	c [mm]	g [mm]	h [mm]	i [mm]	k [mm]	l Thread	r [mm]	v [mm]	w Thread	Weight [kg]	SAE Flange No.	
IPVA 4 – 13	48.5	13	23	52.4	26.2	M10x15	38.1	17.5	M8x13	7.1	10	12
IPVA 4 – 16	52.5	14	25	52.4	26.2	M10x15	38.1	17.5	M8x13	7.3	10	12
IPVA 4 – 20	58	18	27	58.7	30.2	M10x15	47.6	22.3	M10x15	7.9	11	13
IPVA 4 – 25	64	18	30	58.7	30.2	M10x15	47.6	22.3	M10x15	8.3	11	13
IPVA 4 – 32	73	18	32	58.7	30.2	M10x15	47.6	22.3	M10x15	9.1	11	13

IPVA 4, design

Rotation

Mounting flange



Shaft end

Standard

Rotation clockwise




SAE 2-hole
flange




7

Parallel shaft
with keyway
connection




1


IPVA 5, rotation and dimensions

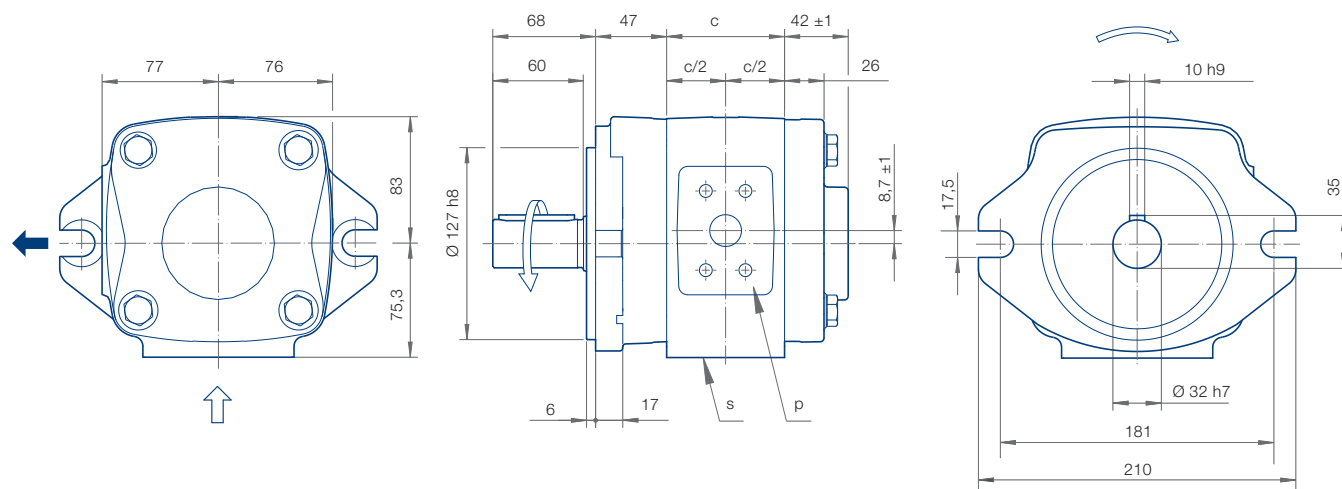

Pressure port (P)



Suction port (S)



Type/ Delivery	c [mm]	g [mm]	h [mm]	i [mm]	k [mm]	l Thread	r [mm]	v [mm]	w Thread	Weight [kg]	SAE Flange No.	
IPVA 5 – 32	65	18	32	58.7	30.2	M10x15	47.6	22.3	M10x15	13.0	11	13
IPVA 5 – 40	71	19	35	69.9	35.7	M12x20	52.4	26.2	M10x15	14.1	12	30
IPVA 5 – 50	78	21	40	69.9	35.7	M12x20	52.4	26.2	M10x15	15.9	12	30
IPVA 5 – 64	89	23	40	69.9	35.7	M12x20	52.4	26.2	M10x15	17.3	12	30

IPVA 5, design

Rotation

Mounting flange



Shaft end

Standard

Rotation clockwise




SAE 2-hole
flange




0

Parallel shaft
with keyway
connection




1


IPVA 6, rotation and dimensions

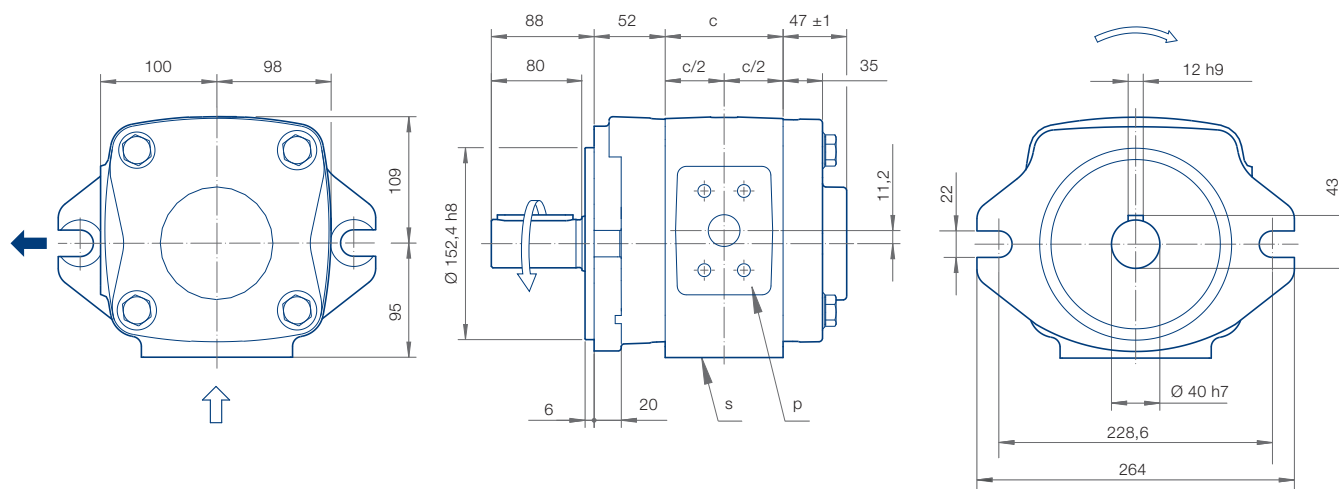

Pressure port (P)



Suction port (S)



Type/ Delivery	c [mm]	g [mm]	h [mm]	i [mm]	k [mm]	l Thread	r [mm]	v [mm]	w Thread	Weight [kg]	SAE Flange No.	
IPVA 6 – 64	80	23	40	69.9	35.7	M12x20	52.4	26.2	M10x15	26.3	12	30
IPVA 6 – 80	88	23	45	77.8	42.9	M12x20	69.9	35.7	M12x20	27.9	14	15
IPVA 6 – 100	98	27	50	77.8	42.9	M12x20	69.9	35.7	M12x20	31.2	14	15
IPVA 6 – 125	110	30	50	77.8	42.9	M12x20	69.9	35.7	M12x20	34.0	14	15

IPVA 6, design

Rotation

Mounting flange



Shaft end

Standard

Rotation clockwise




SAE 2-hole
flange



0


Parallel shaft
with keyway
connection



1


Measurement values – Airborne noise level (measuring location 1 m axial)

IPVA 3

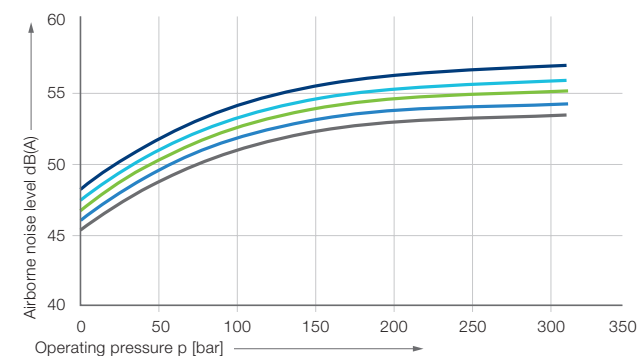


— IPVA 3 – 10 — IPVA 3 – 6.3 — IPVA 3 – 3.5
 — IPVA 3 – 8 — IPVA 3 – 5

IPVA 4

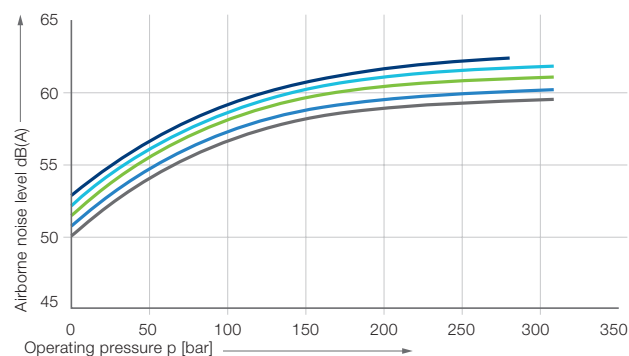


— IPVA 4 – 32 — IPVA 4 – 20 — IPVA 4 – 13
 — IPVA 4 – 25 — IPVA 4 – 16

IPVA 5

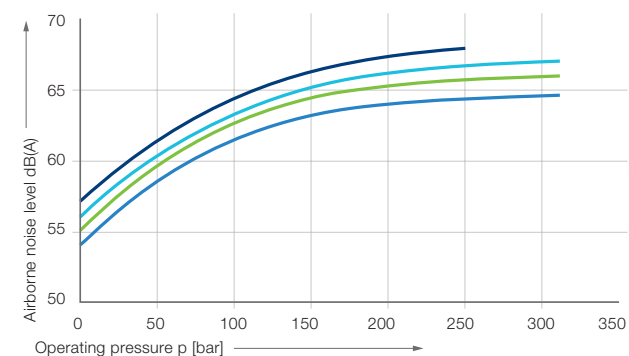

— IPVA 5 – 64 — IPVA 5 – 40
 — IPVA 5 – 50 — IPVA 5 – 32

IPVA 6

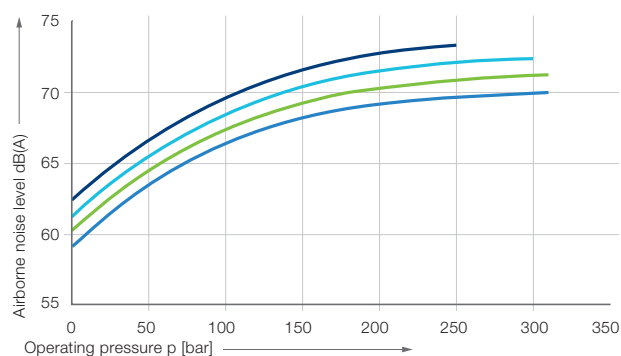

— IPVA 5 – 125 — IPVA 5 – 80
 — IPVA 5 – 100 — IPVA 5 – 64

Measurement conditions


- Speed: 1500 rpm
- Viscosity of pressure fluid: $46 \text{ mm}^2\text{s}^{-1}$
- Operating temperature: $40 \text{ }^\circ\text{C}$

Note


Measurement taken in a low-noise room. In a anechoic room, the measurements are approx. 5 dB(A) lower.

Measurement values – Efficiency η_v and η_g


IPVA 3

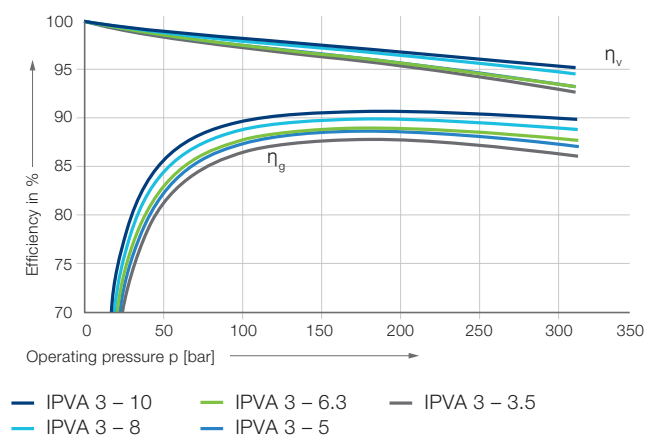


IPVA 4

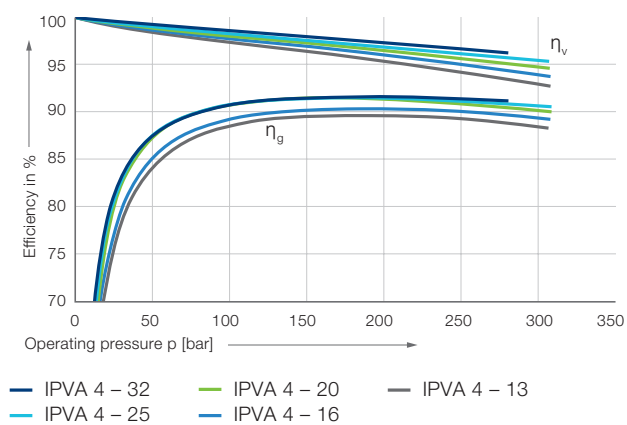

IPVA 5

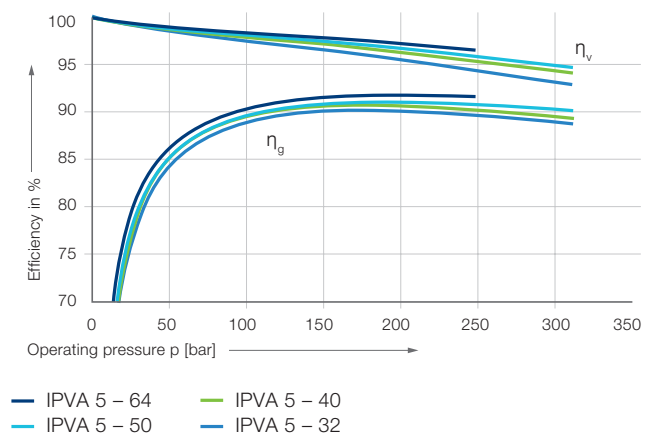


IPVA 6

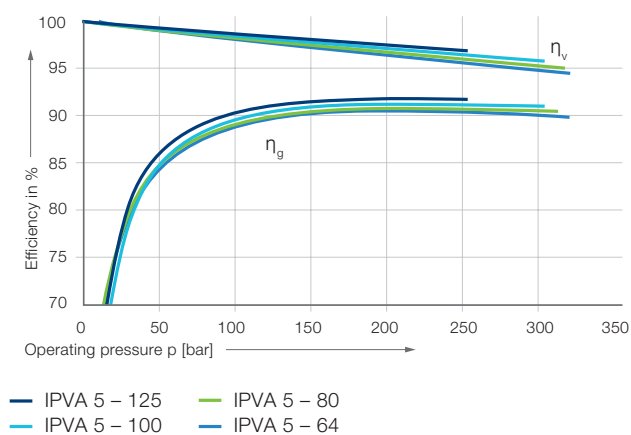

Measurement conditions

- Speed: 1500 rpm
- Viscosity of pressure fluid: 46 mm²s⁻¹
- Operating temperature: 40 °C

Suction and pressure flange according to SAE...

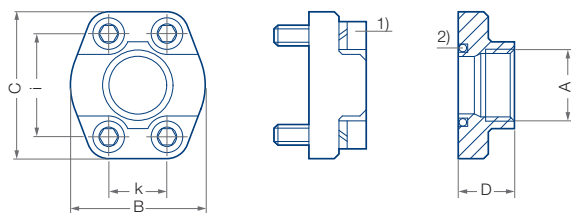

Wrench torque for screws according to ISO 6162

¹⁾ Screw EN ISO 4762


²⁾ Round seal ring (O-Ring) ISO-R 1629 NBR

³⁾ Special design. Deviation from SAE J 518 C Code 61

SAE flange no.		A Thread	B [mm]	C [mm]	D [mm]	E ¹⁾ Seal ring	i [mm]	k [mm]	S ²⁾ Thread	Max. pressure [bar]
SAE J 518 C Code 61	10	G ½	46	54	36	18.66 – 3.53	38.1	17.5	M8	345
	11	G ¾	50	65	36	24.99 – 3.53	47.6	22.3	M10	345
	12	G 1	55	70	38	32.92 – 3.53	52.4	26.2	M10	345
	13	G 1-¼	68	79	41	37.69 – 3.53	58.7	30.2	M10	276
	14 ³⁾	G 1-½	82	98	50	47.22 – 3.53	69.9	35.7	M12	345 ³⁾
	30	G 1-½	78	93	45	47.22 – 3.53	69.9	35.7	M12	207
	15	G 2	90	102	45	56.74 – 3.53	77.8	42.9	M12	207
	16	G 2-½	105	114	50	69.44 – 3.53	88.9	50.8	M12	172
	17	G 3	124	134	50	85.32 – 3.53	106.4	61.9	M16	138
	17/2	G 3-½	136	152	48	98.02 – 3.53	120.7	69.9	M16	35
	18	G 4	146	162	48	110.72 – 3.53	130.2	77.8	M16	34
SAE J 518 C Code 62	50	G ½	46	54	36	18.66 – 3.35	40.5	18.2	M8	414
	51	G ¾	55	71	35	24.99 – 3.53	50.8	23.8	M10	414
	52	G 1	65	81	42	32.92 – 3.53	57.2	27.8	M12	414
	53a	G 1-¼	78	95	45	37.69 – 3.53	66.6	31.8	M14	414
	54	G 1-½	94	112	112	47.22 – 3.53	79.3	36.5	M16	414
	55	G 2	114	134	65	56.75 – 3.53	96.8	44.5	M20	400
	56	G 2-½	152	180	80	69.45 – 3.53	123.8	58.8	M24	400

Multi-flow pumps, pump combinations,

Sequence in order of type and size

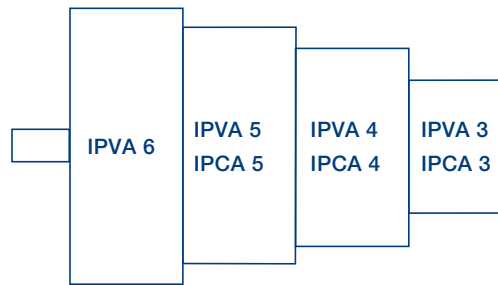

Pump combinations

- IPVA, IPCA pumps of identical or different sizes can be combined in multiflow pumps.
- All sizes of the relevant pump volume are available as two- or three-flow pumps
- The pumps are arranged in decreasing order according to frame size and delivery.

Selection

1. Determine pressure ranges and define the appropriate pump serie(s)
2. Determine pump volume and select the appropriate size
3. Define sequence of the pumps
4. Check the torques

Mounting, assembly

Multi-flow pumps are generally mounted to the drive by means of a flange.

Designs

Rotation and suction


Mounting flange

Shaft end

clockwise (cw)



1



1

0 SAE-2-hole-flange

SAE-2-hole-flange (variant)

1


Special design

4

7


Allowed input torques

Size	A [Nm]	B [Nm]
3	160	80
4	335	190
5	605	400
6	1 050	780



Type code

IPVA 3-3.5 1 0 1

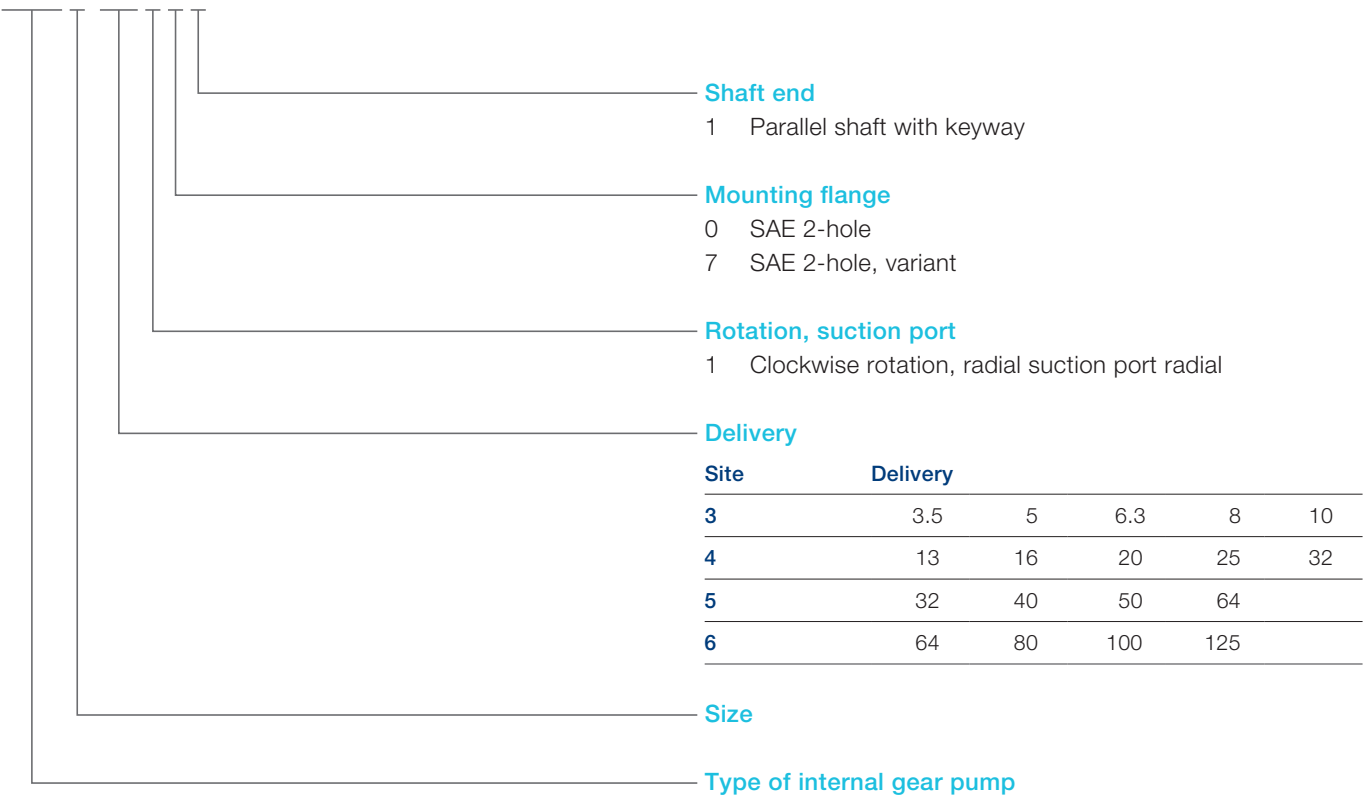

Type code for multiple flow capable variants

IPVA 4/ - 20/ 1 7 1

following multiple flow capable pump stage of the same size, freely selectable delivery volumes

IPVA 4/3 - 20/ 1 7 1

following multiple flow capable predetermined pump stage of the same or smaller size, freely selectable delivery volumes

This is a translated document
Original language: German
Legally binding language version of the document: German
3159-000110-DSH-DEX-00

Voith Group
St. Poeltener Str. 43
89522 Heidenheim
Germany

Contact:
Phone +49 7152 992 3
sales-rut@voith.com

www.voith.com/hydraulics



VOITH